

A.caminetti

ECO FIREPLACES



ECO SERIES

Crystal 3D 50x60 ECO

A




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D 50X60 ECO
POWER	7 - 14 KW
EFFICENCY	> 70%
CONSUME	2,7 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	200 KG
FLUE GAS TEMPERATURE	218 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	580 MM
WIDTH	810 MM

CE

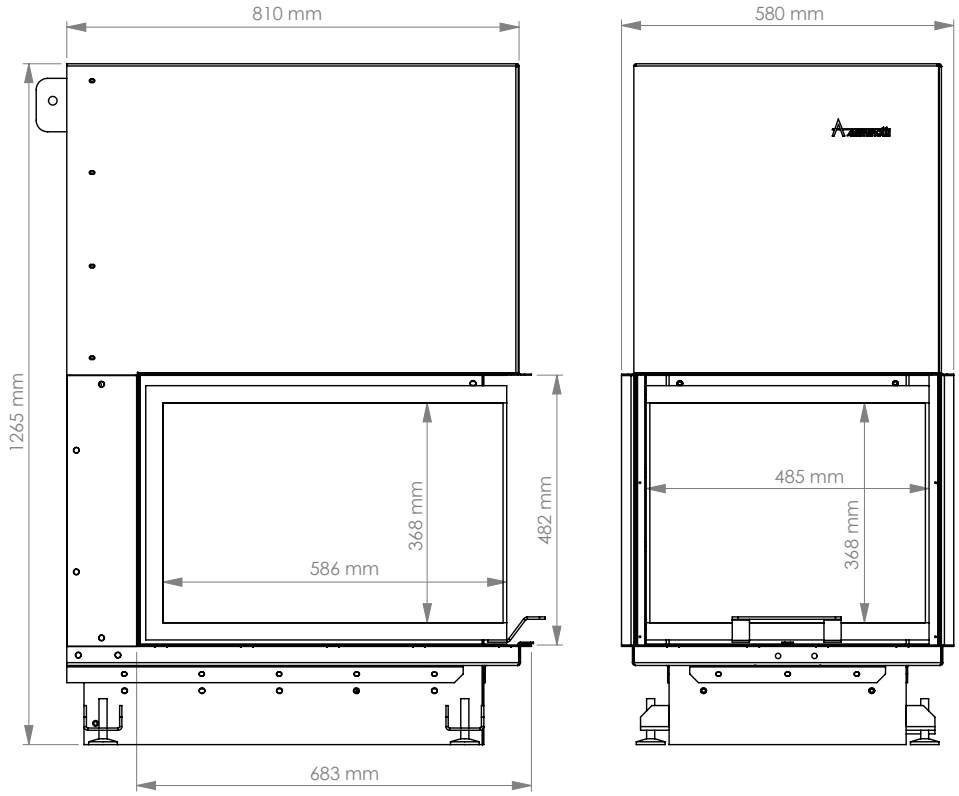

ECO SERIES

Crystal 3D 50x70 ECO

A




TECHNICAL SPECIFICATION

MODEL	CRYSTAL 3D 50X70 ECO
POWER	7 - 14 KW
EFFICENCY	> 70%
CONSUME	2,7 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	220 KG
FLUE GAS TEMPERATURE	218 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	580 MM
WIDTH	910 MM

CE

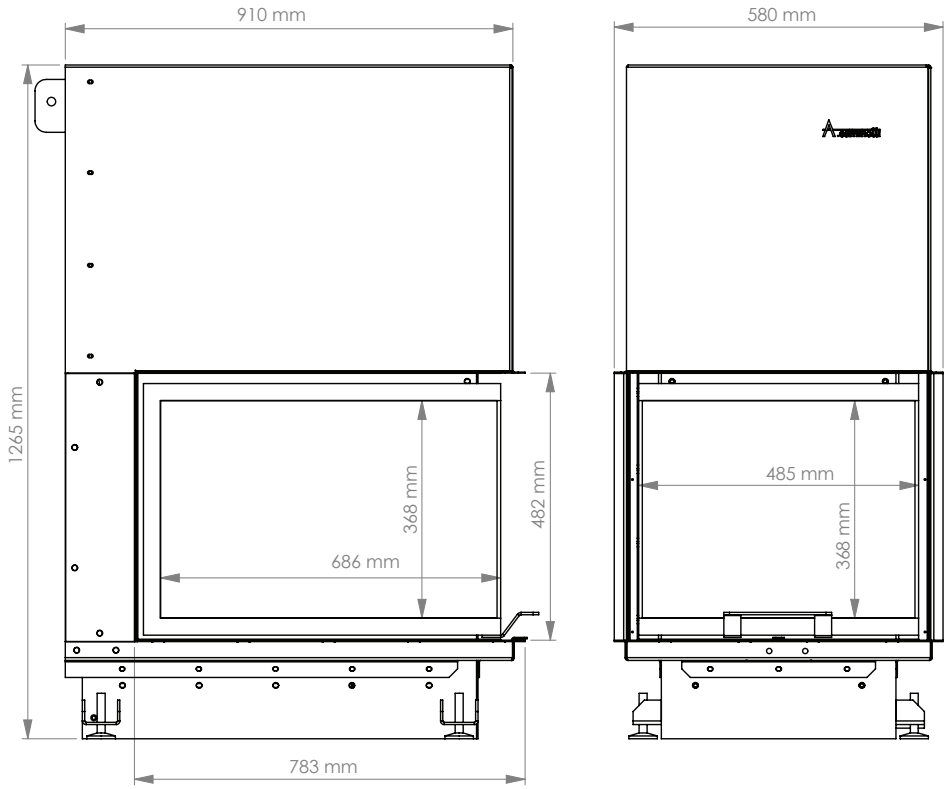

ECO SERIES

Crystal 80 ECO

A




TECHNICAL SPECIFICATION


MODEL	CRYSTAL 80 ECO
POWER	7 - 13 KW
EFFICENCY	> 70%
CONSUME	2,2 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	195 KG
FLUE GAS TEMPERATURE	220 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	512 MM
WIDTH	783 MM

CE

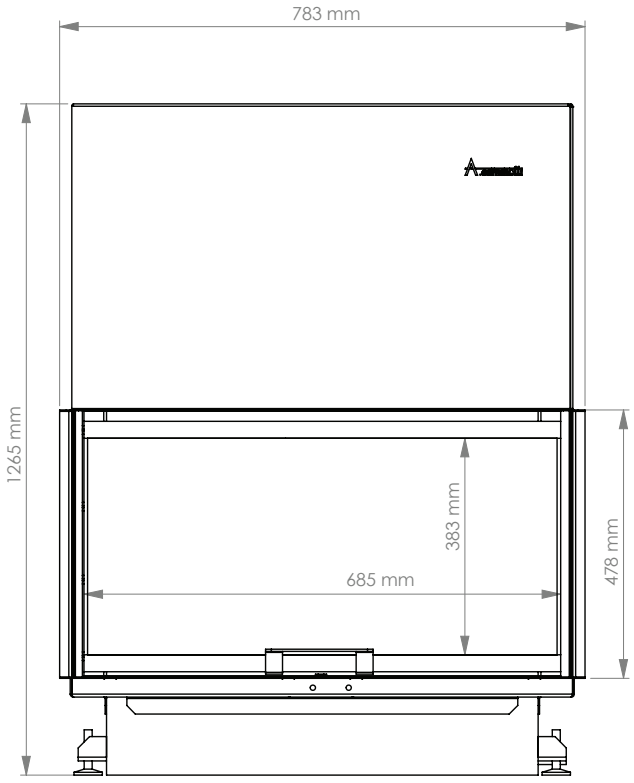

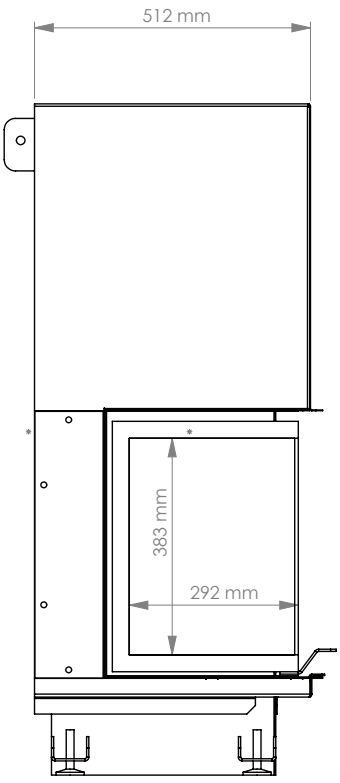

ECO SERIES

Crystal 90 ECO

A




TECHNICAL SPECIFICATION


MODEL	CRYSTAL 90 ECO
POWER	10 - 17 KW
EFFICENCY	> 70%
CONSUME	4,3 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	200 KG
FLUE GAS TEMPERATURE	213 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	512 MM
WIDTH	934 MM

CE

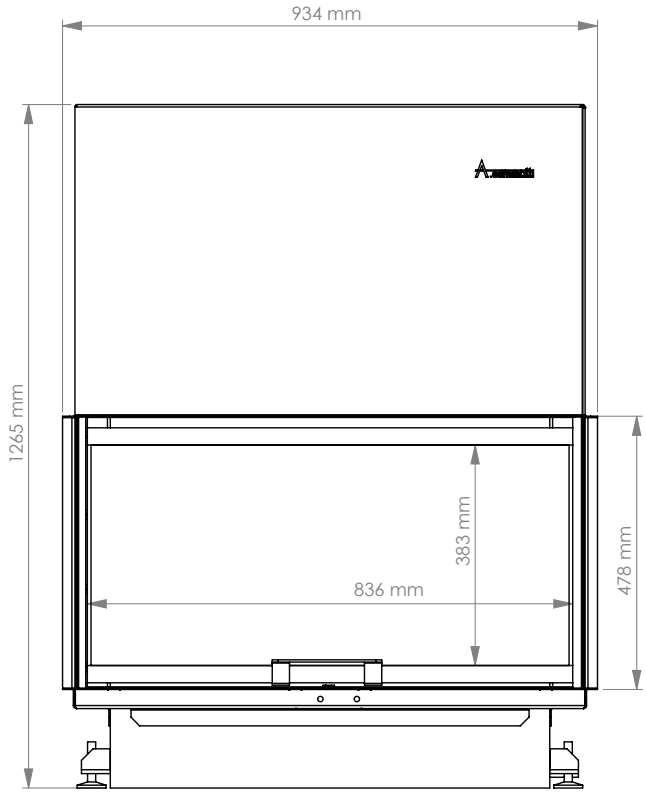

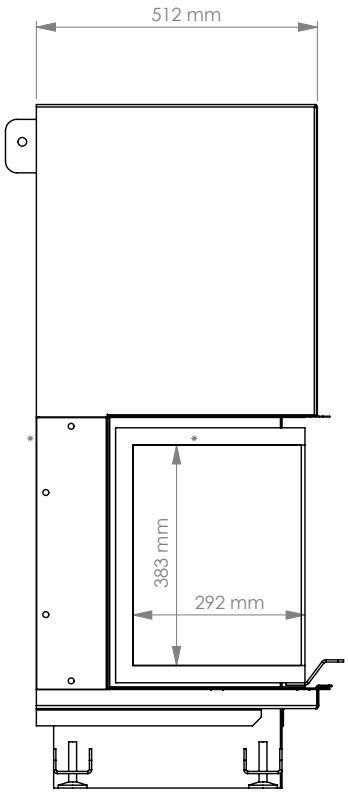

ECO SERIES

Crystal 110 ECO

A




TECHNICAL SPECIFICATION

MODEL	Crystal 110 eco
POWER	13 - 18 KW
EFFICENCY	> 70%
CONSUME	4,8 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	214 KG
FLUE GAS TEMPERATURE	211 ° C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	512 MM
WIDTH	1080 MM

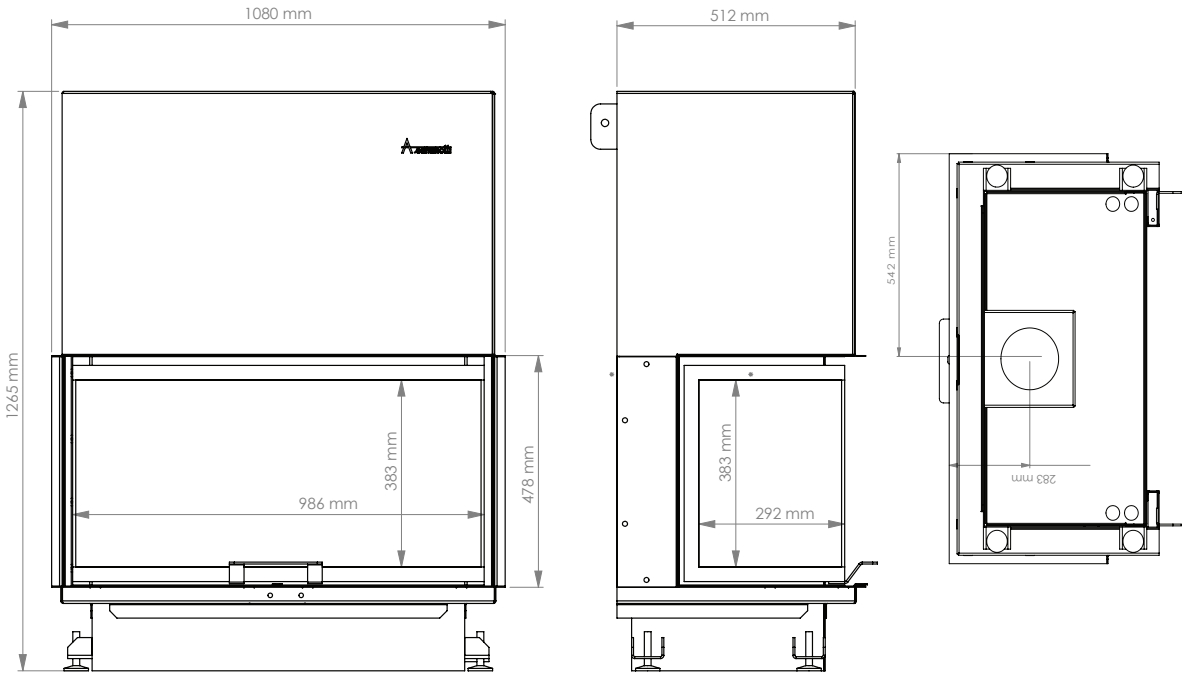

ECO SERIES

Quattro 80 L ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 80 L ECO
POWER	8 - 14 KW
EFFICENCY	> 70%
CONSUME	3.5 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	216 KG
FLUE GAS TEMPERATURE	200 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	810 MM

CE

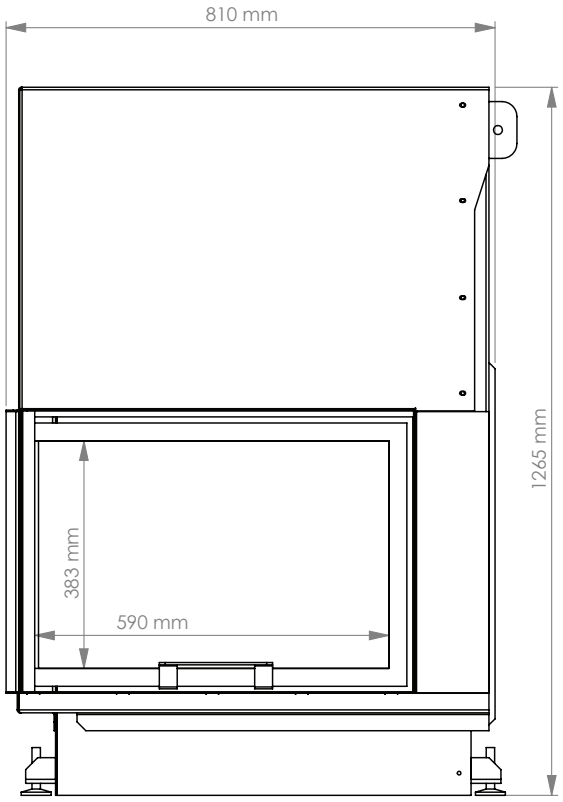

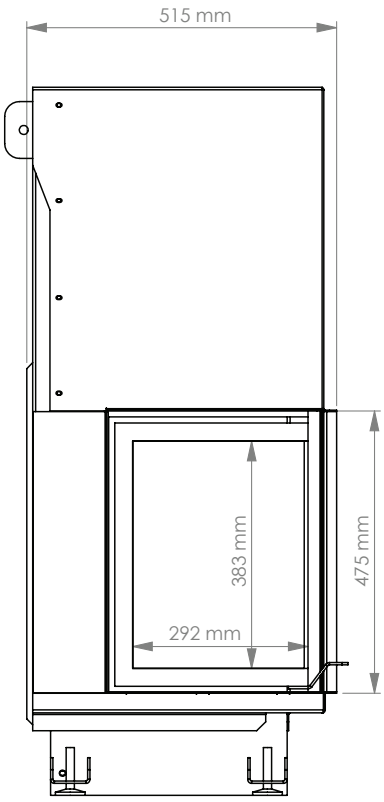

ECO SERIES

Quattro 80 R ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 80 R ECO
POWER	8 - 14 KW
EFFICENCY	> 70%
CONSUME	3.5 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	216 KG
FLUE GAS TEMPERATURE	200 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	810 MM

CE

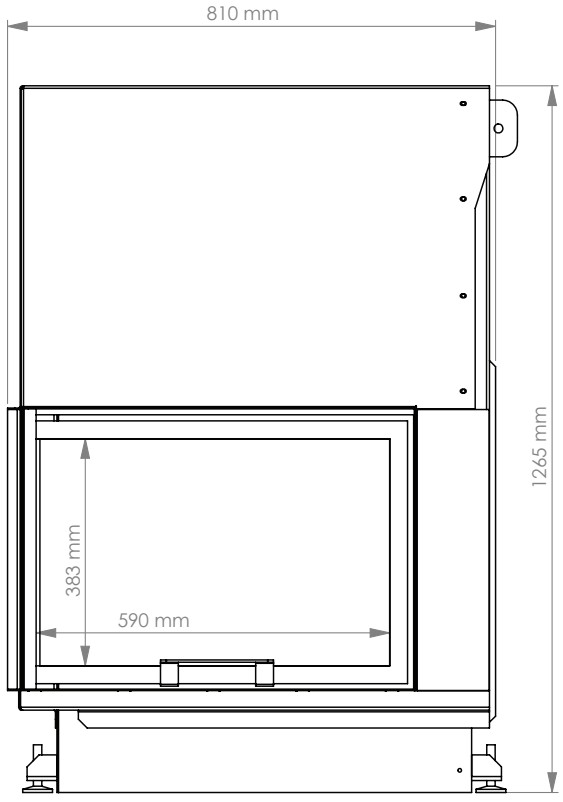

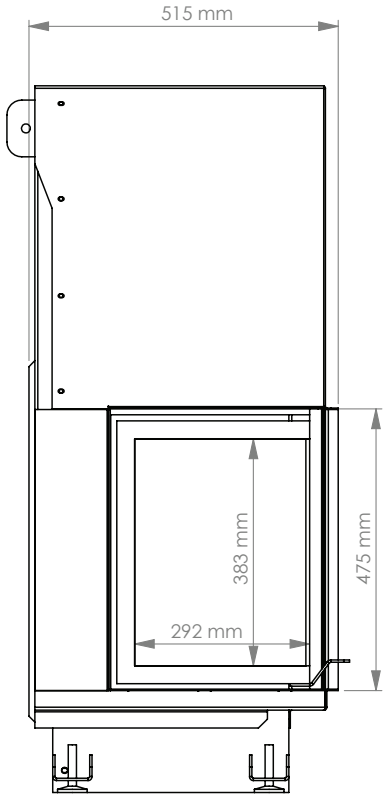

ECO SERIES

Quattro 90 L ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 90 L ECO
POWER	8 - 14 KW
EFFICENCY	70%
CONSUME	3,7 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	204 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	910 MM

CE

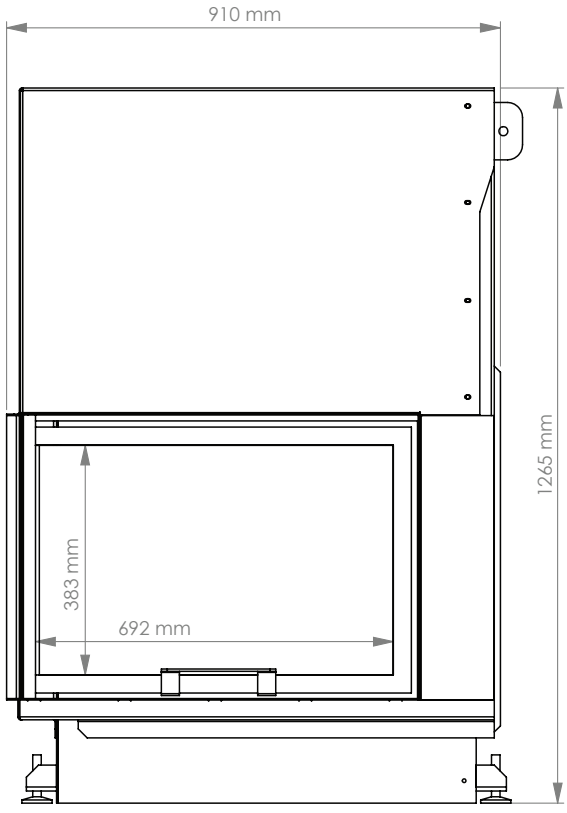

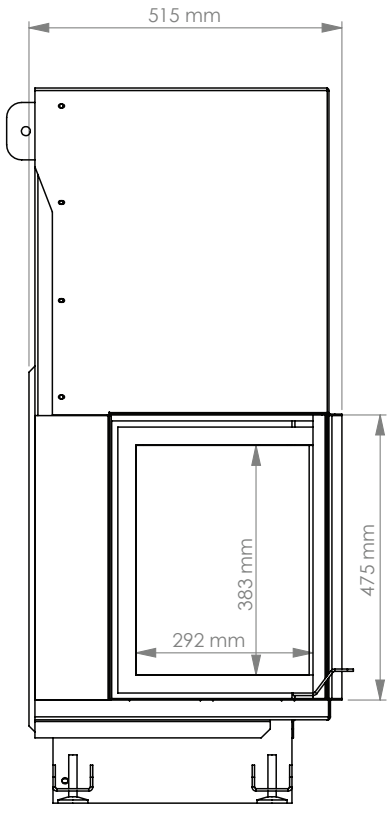

ECO SERIES

Quattro 90 R ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 90 R ECO
POWER	8 - 14 KW
EFFICENCY	> 70%
CONSUME	3,7 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	204 KG
FLUE GAS TEMPERATURE	206 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	910 MM

CE

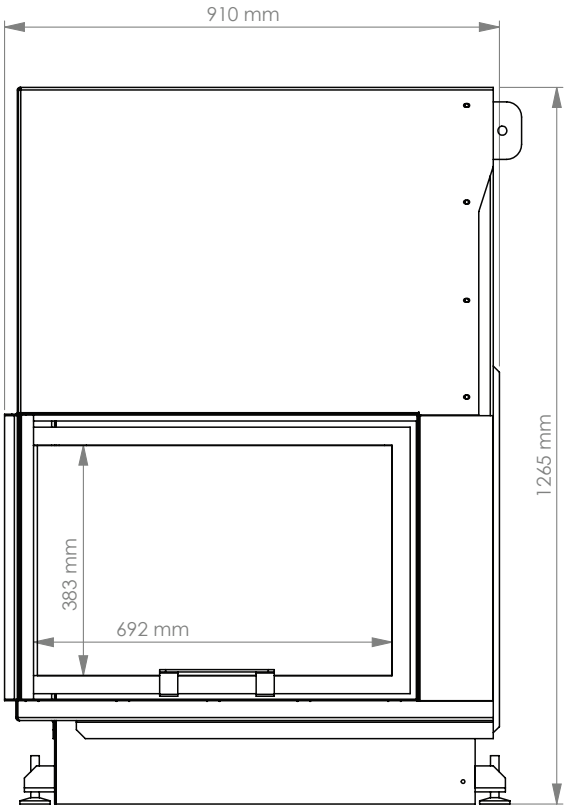

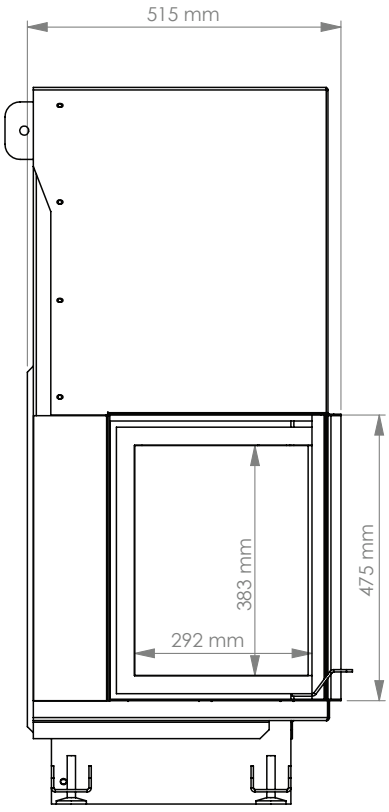

ECO SERIES

Quattro 100 L ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 100 L ECO
POWER	13 - 17 KW
EFFICENCY	> 70%
CONSUME	4,3 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	216 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	1060 MM

CE

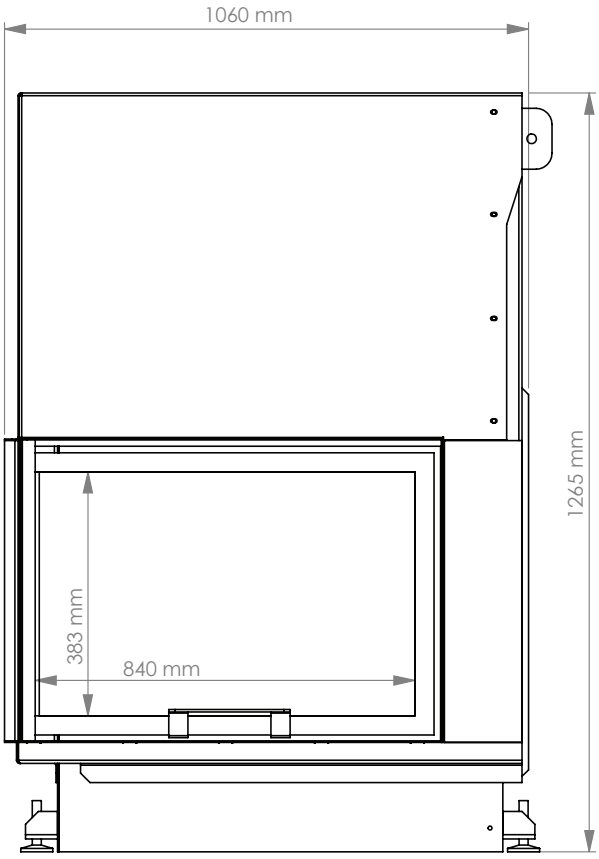

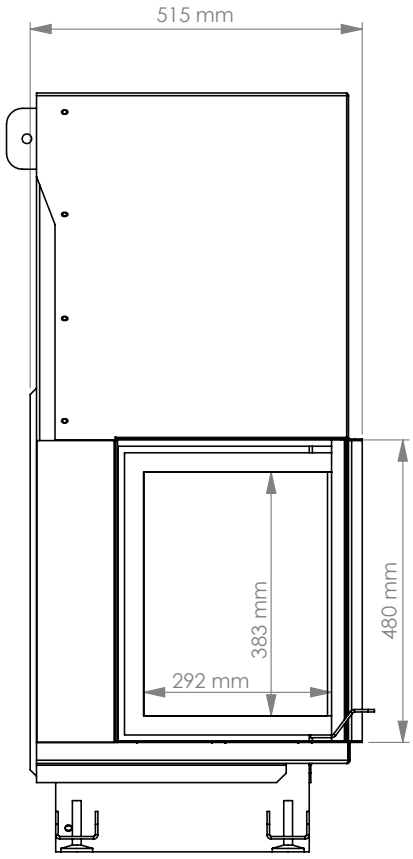

ECO SERIES

Quattro 100 R ECO

A




TECHNICAL SPECIFICATION


MODEL	QUATTRO 100 R ECO
POWER	13 - 17 KW
EFFICENCY	> 70%
CONSUME	4,3 KG/H
FRESH AIR INLET	ø 160 MM
WEIGHT	216 KG
FLUE GAS TEMPERATURE	198 °C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	2 YEARS

OVERALL DIMENSION

HEIGHT	1265 MM
DEPTH	515 MM
WIDTH	1060 MM

CE

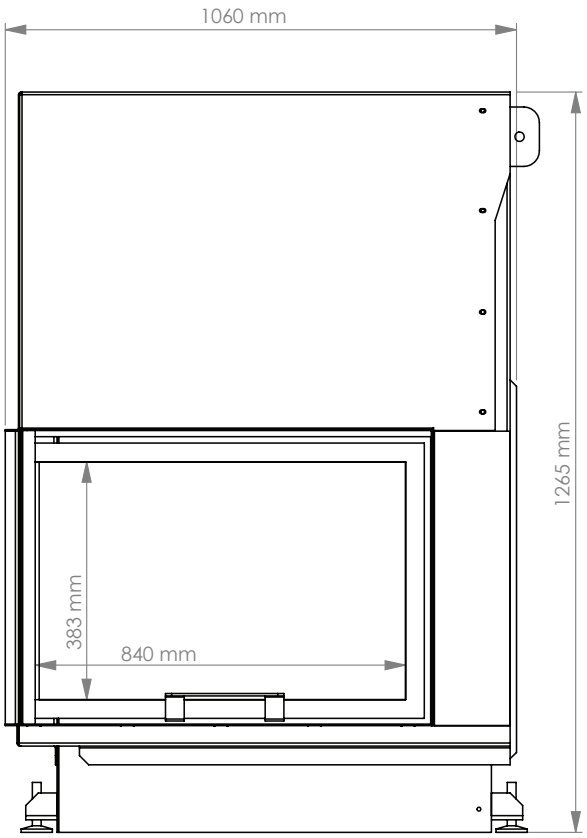

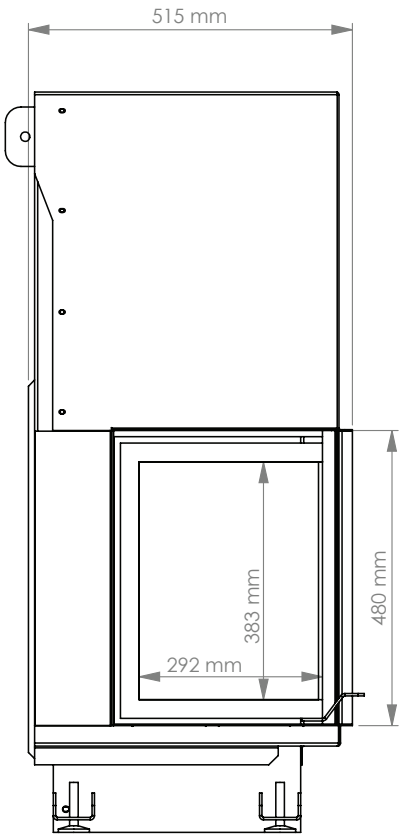

ECO SERIES

FLAT 75x50 ECO

A




TECHNICAL SPECIFICATION

MODEL	FLAT 75/50 ECO
POWER	9- 15 KW
EFFICENCY	≥ 70%
CONSUME	4,5 KG/H
FRESH AIR INLET	ø 150 MM
WEIGHT	218 KG
FLUE GAS TEMPERATURE	215 ˚C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	5 YEARS

OVERALL DIMENSION

HEIGHT	1222 MM
DEPTH	582 MM
WIDTH	1095 MM

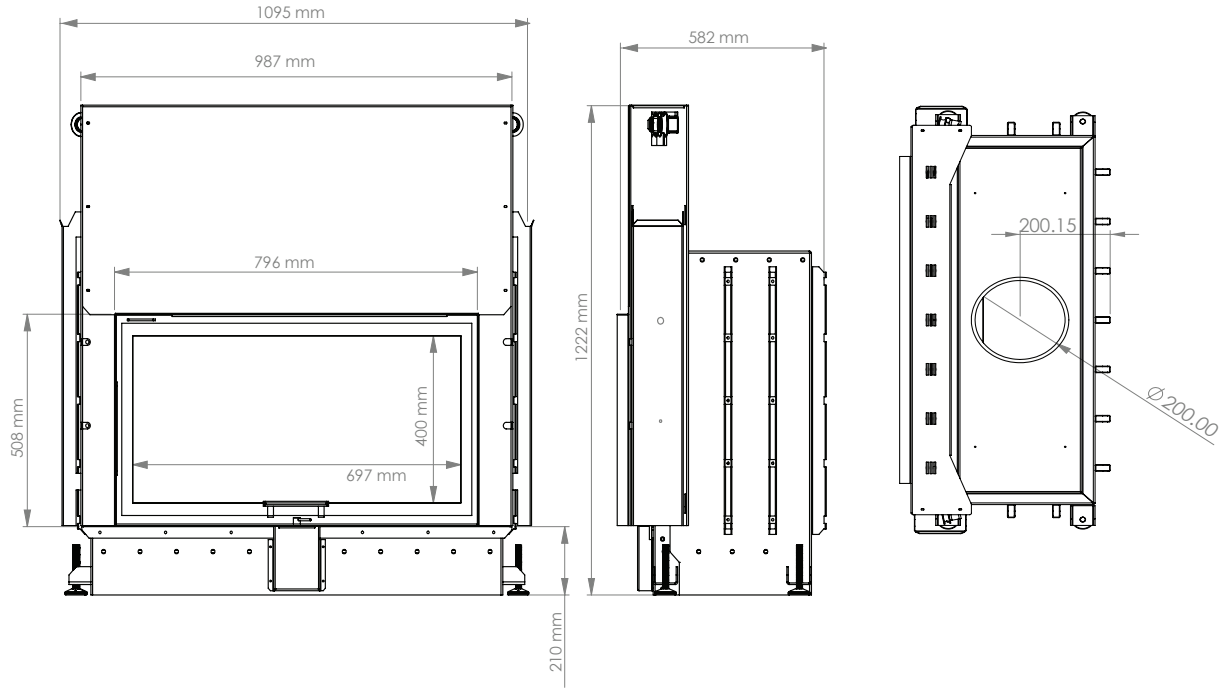

ECO SERIES

FLAT 90x50 ECO

A




TECHNICAL SPECIFICATION

MODEL	FLAT 90/50 ECO
POWER	13 - 17 KW
EFFICENCY	≥ 70%
CONSUME	4,5 KG/H
FRESH AIR INLET	ø 150 MM
WEIGHT	235 KG
FLUE GAS TEMPERATURE	202 ˚C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	5 YEARS

OVERALL DIMENSION

HEIGHT	1222 MM
DEPTH	582 MM
WIDTH	1295 MM

CE

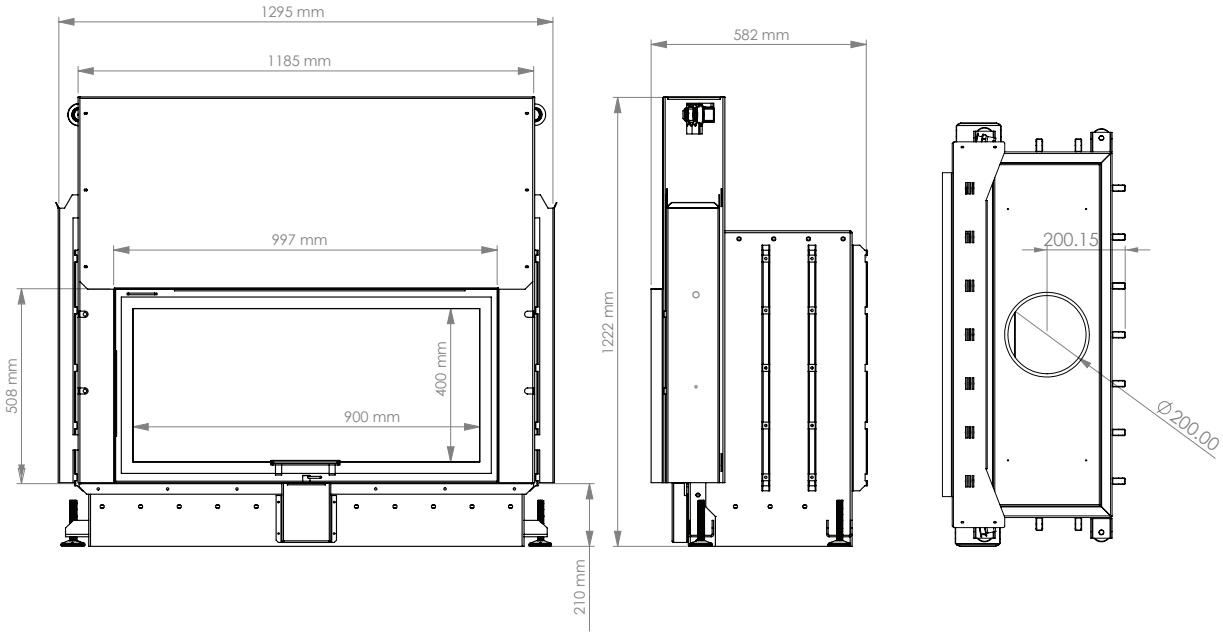

ECO SERIES

FLAT 110x50 ECO

A




TECHNICAL SPECIFICATION


MODEL	FLAT 110/50 ECO
POWER	13 - 17 KW
EFFICENCY	≥ 70 %
CONSUME	4,5 KG/H
FRESH AIR INLET	ø 150 MM
WEIGHT	258 KG
FLUE GAS TEMPERATURE	210 ˚C
FUEL	WOOD/BRIQUETTE
PIPE DIAMETER	ø 200 MM
WARRANTY	5 YEARS

OVERALL DIMENSION

HEIGHT	1222 MM
DEPTH	582 MM
WIDTH	1495 MM

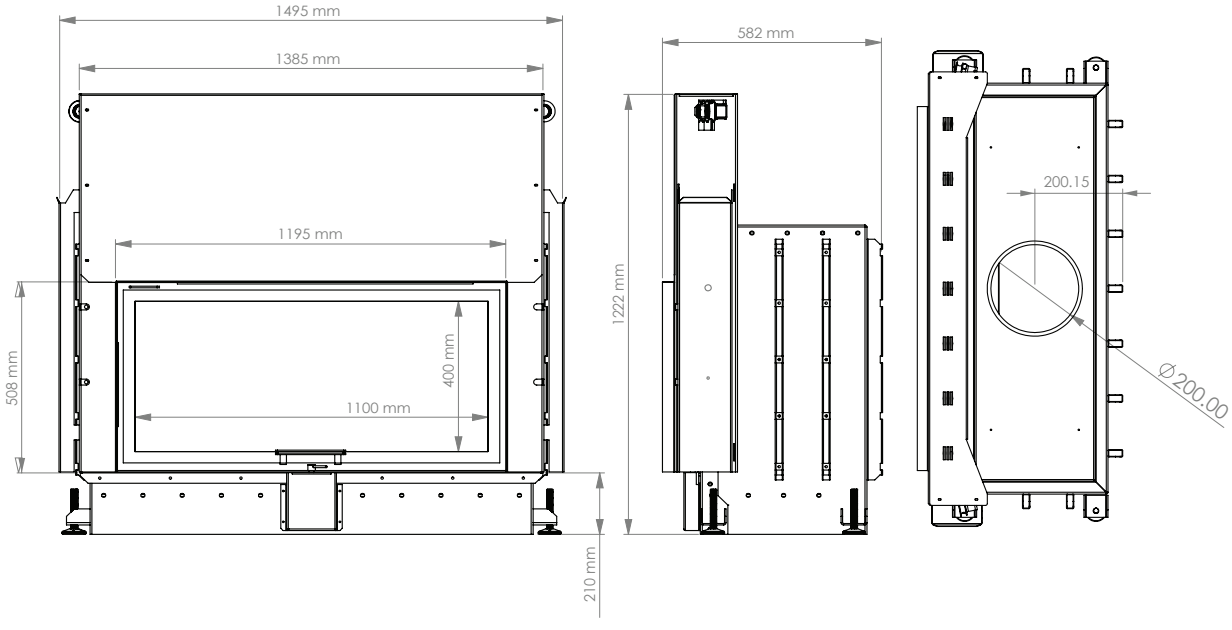


YOU ALWAYS HAVE A CHOICE,
MAKE THE RIGHT ONE!
A.caminetti

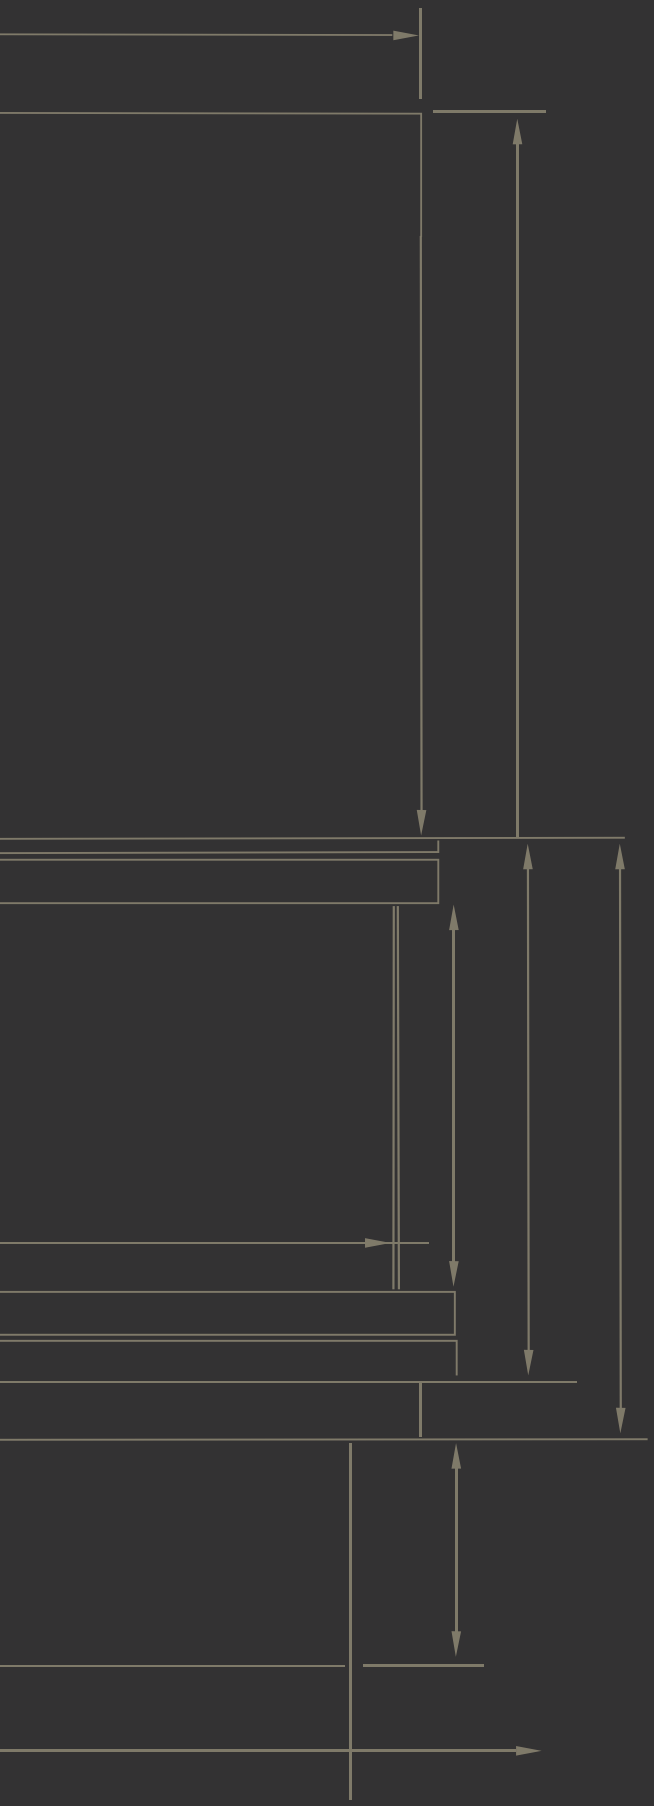

A.caminetti

info@acaminetti-factory.com

ergolding@acaminetti-factory.com

Am Industriegleis 6a, 84030 Ergolding, Germany

National Road, Km 2, Korçë-Ersekë, Albania

acaminetti-factory.com